


1. Door under 33" in width (67" for double door) will lose 2 vertical pickets.
2. Door under 75" in height will lose the horizontal center casting (a 1" x 2" center bar will replace the center horizontal casting).
3. Door cannot be self-storing if under 30" in width or under 75" in height.
4. Available in double door units (we must know the active door from outside looking in). Minimum opening width for self-storing is 61".
5. Minimum width is: 29" (single door)
6. Minimum width is: 59" (double door)
7. Minimum height is: 73"
8. Maximum height is: 84"
9. Door under 80" height self-storing will lose bottom casting.
10. Door under 79" height non self-storing will lose bottom casting.
11. If 74" height and below, lock will be raised 6", unless noted by customer.
12. Bank-vault lock cannot be raised, only lowered 6".
13. GTL lock (bank-vault without lock rod) can be raised or lowered.
14. If door is 88" in height or above, specify if customer wants the lock lowered 6".
15. Minimum height to receive mail/magazine slot: 75"
16. Minimum width to receive standard mail slot: 30"
17. Minimum width to receive magazine slot: 32"

NOTE: This door can be built non self-storing less than 75" in height, and less than 30" in width.



SD-114 Bird of Paradise

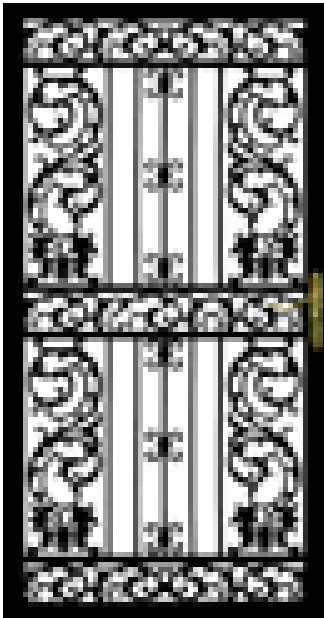